
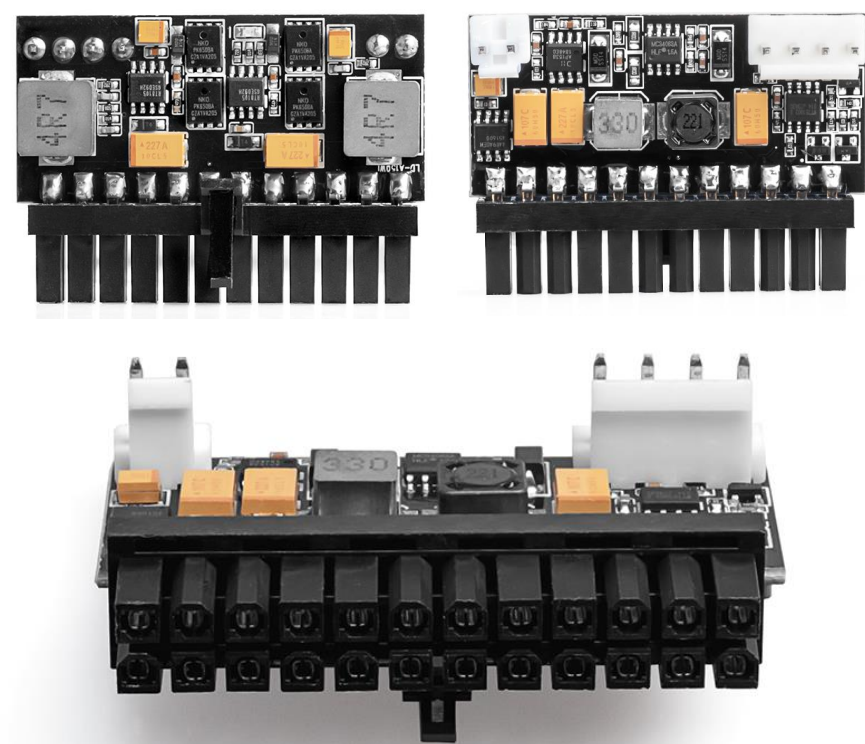


PSU-PICO-150P


DC TO DC 12V POWER SUPPLY UNIT

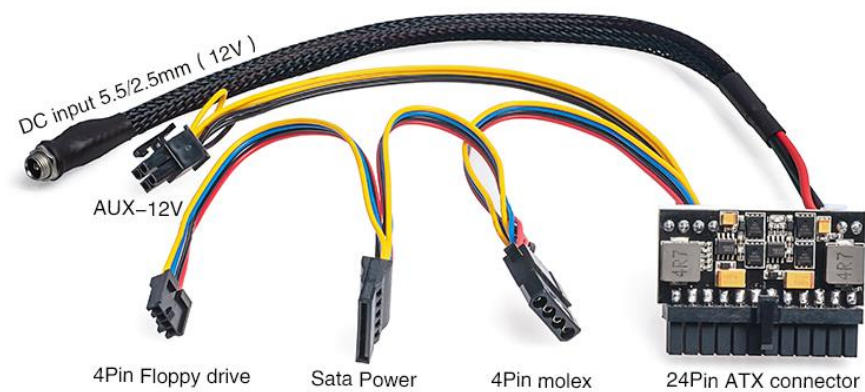

SPECIFICATIONS

Input Voltage Range	11.4 VDC – 12.6VDC
Incoming Current Range	16.0A Max @ 11.4 VDC
Input Surging Current	12.0A Max @ 12 VDC
Work Efficiency	≥ 85%
Working Temperature Humidity	-5°C to 55°C 45% - 75%
Reposition Temperature Humidity	-40°C to +70°C 10% - 90%
Atmospheric Pressure	86Kpa – 106 Kpa

*All product specifications and product images are subject to change without notice.

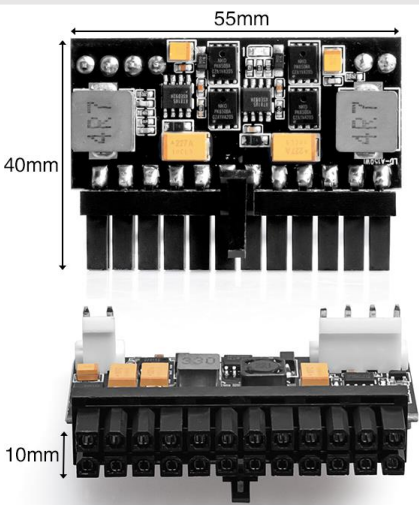

Item	Output Voltage				Output Current (A)		
	Min (V)	Avg (V)	Max (V)	Ripplewave (mV)	Sb Current	Avg	Peak
+3.30V	+3.14	+3.30	+3.47	50	0	4	6.0
+5.00VSB	+4.75	+5.00	+5.25	50	0.1	1.5	2.0
+5.00V	+4.75	+5.00	+5.25	50	0	4	6.0
+12.00V	+11.40	12.00	+12.60	120	0	4	8.0
-12.00V	-11.40	-12.00	-12.60	120	0	0.05	0.1