

Multi-1/USB



» Features

- 1 Port USB to Serial Converter
- Supports USB 2.0 Full-Speed
- RS-232 or RS-422/485(Combo) Interface: 1 port
- Maximum Communication Speed: 921.6kbps
- Display Communication Status through TX/ RX LED
- Auto Toggling: Automatic control I/O of the Bus for RS-422/485
- Slew-rate Limit Control
- 15kV Surge Protection

Overview

Easily and quickly add additional serial ports to your system through the USB port. The Multi-1/USB delivers maximum performance up to 921.6kbps. It has all the necessary components for the serial communication that the developers do not require additional components to design the product. The USB to Serial Multi-ports support most Windows and Linux operating systems and include 15,000 volt surge suppression eliminating blown ports. There are RS232 and RS422/485 (Combo) models with DE-09 connector. Simply plug in the USB connector and you have a COM port to connect modems, printers, bar-code scanners or other any serial devices

Auto Toggling

The Multi-1/USB has a built-in hardware feature that performs automatic toggling to prevent devices from sending data at the same time causing a crash. This operation is crucial when multiple devices are connected to prevent electrical collisions that lead to errors and unstable communication.

Slew-Rate Limit Control

The Multi-1/USB is equipped with Slew Rate limit control for RS422/485 interface and when enabled it minimizes EMI emissions which may cause data transmission errors. When Slew Rate is used maximum communication speed is 250kbps. This function is recommended in many medical applications.

Specification

USB Bus Interface

Specification	USB Specification Rev. 2.0 Full-Speed
---------------	---------------------------------------

Serial

Interface	RS232, RS422/485 (Combo)
Number of Ports	1
Maximum Speed	921.6kbps
Signal Lines	RS232: TXD, RXD, DTR, DSR, RTS, CTS, DCD, GND, RI RS422: TXD+, TXD-, RXD+, RXD- RS485: TRXD+, TRXD-
Surge Protection	Built-in ESD Protection: ±15kV
Flow Control	RTS/CTS, XON/XOFF
Data Crash Prevention	Auto Toggling

Hardware

Controller	FT232R
Connector	DE-09P (DB9 Male)

Software

Supported OS	Windows XP/ 2003/ Vista/ 2008/ 7/ 8/ 8.1/ 10/ 2012 (32/64 bit)/ Linux
Utility	TestView

Operating Environment

Operating Temperature	0 ~ 50 °C
Storing Temperature	-20 ~ 70 °C
Humidity	5 ~ 95% Non-Condensing


Certifications

KC, CE, FCC


Ordering Information

Multi-1/USB RS232	Multi-1/USB RS232, Driver and Manual CD
Multi-1/USB Combo	Multi-1/USB Combo(RS422/RS485), Driver and Manual CD

Pin Assignment

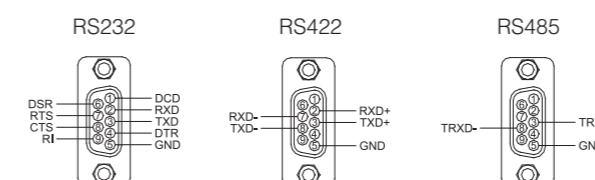

Dimension

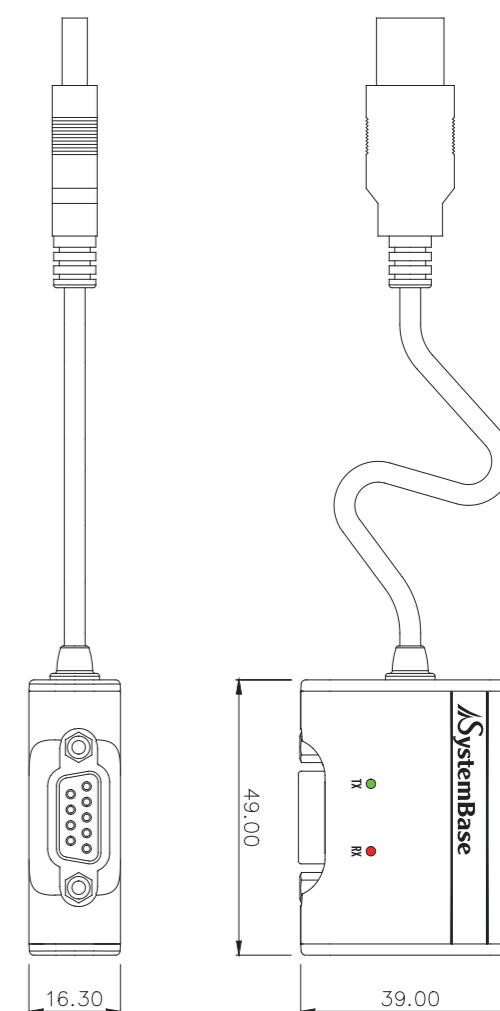

unit : mm

Sales : marketing@sysbas.com
Technical Support : www.solvline.com