


P150-10AI


15" Panel PC / Intel® Apollo Lake Celeron Processor

Feature

- 15" TFT LCD with 70,000 hrs backlight lifetime
- True-flat touchscreen with projected capacitive
- Front panel IP65-rated, fanless design
- Inside Intel® Apollo Lake-M N3350 Processor

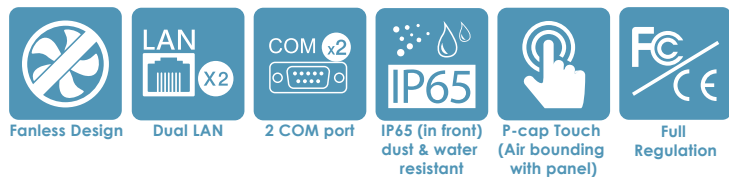


I/O Interface

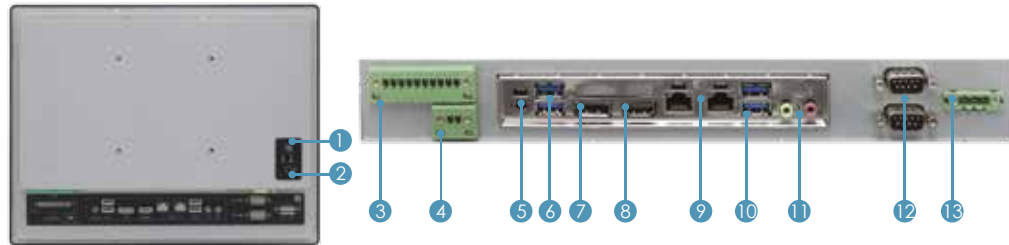

- ① Power
- ② Reset
- ③ 8bit GPIO
- ④ Remote Power on/off
- ⑤ DC-in (DC Jack)
- ⑥ USB 3.0
- ⑦ DisplayPort
- ⑧ HDMI
- ⑨ Giga LAN
- ⑩ USB 3.0
- ⑪ Mic-in, Line-out
- ⑫ COM
- ⑬ DC-in (terminal block)

Dimension (mm)

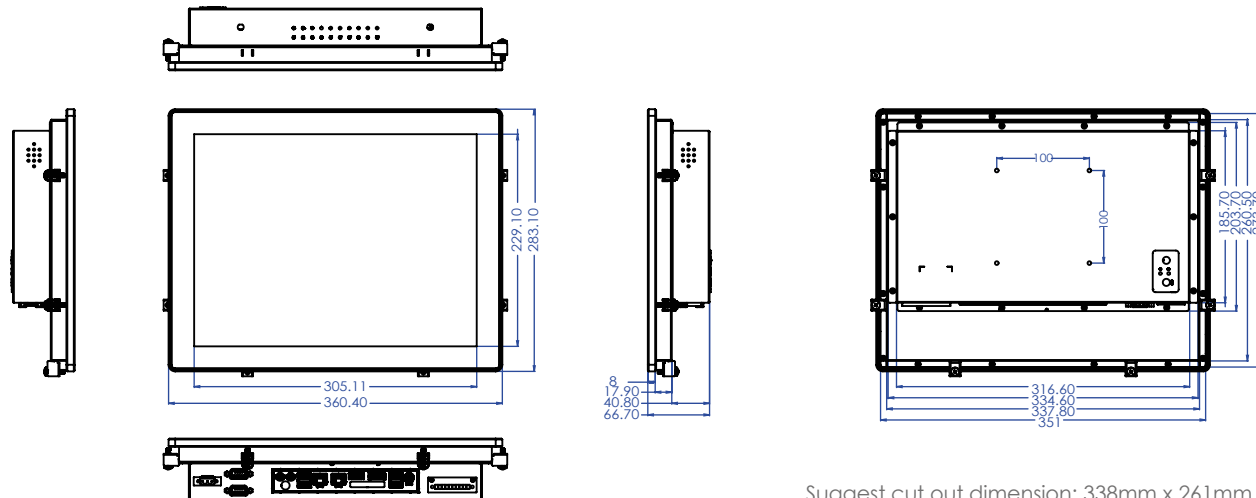

Suggest cut out dimension: 338mm x 261mm

P150-10AI Industrial Panel PC

LCD		
Display Type	15" TFT-LCD	
Max. Resolution	1024 x 768	
Max. Colors	16.7M (8 bit/color)	
Luminance (cd/m2)	300	
Viewing Angle (H/V)	176°/176°	
Led Backlight (Hours)	70,000	
High Brightness	Option	
TOUCH SCREEN		
Type	P-CAP	
Touch Screen	True-flat 10 points	
AR/AG	Option	
SYSTEM		
PD10AI	Processor	Intel® Apollo Lake-M N3350 Processor Option: N4200
	Chipset	Intel® SoC integrated
	System Memory	DDR3L 1866 MHz, 2 x 204-pin SO-DIMM, Max. 8GB (Non-ECC)
	Ethernet	2 x Intel® I211-AT Giga LAN
	I/O Port	1 x DC in terminal block
		1 x DC Jack
		4 x USB3.0
		2 x RS232
		2 x RJ45
		1 x DisplayPort
		1 x HDMI
		1 x Mic-in, 1 x Line-out
		1 x 8bit GPIO terminal block
		Watchdog Timer
	Storage Disk Drive	1 x SATA 2.5" HDD/SSD bay
	Expansion Slot	1 x M.2 2280 B key
		1 x M.2 2230 E key(PCIe / USB)
	Stereo Speaker	2 x 2W
Os Support	Windows® 10 enterprise 1703	

POWER REQUIREMENT	
Power Input	DC 8 ~ 24V
Power Adapter	AC to DC, DC19V 65W adapter
MECHANICAL	
Dimension	283.1 x 360.4 x 66.7mm (W X D X H)
Weight	TBD
Mounting	VESA 100mm / Panel Mount
ENVIRONMENTAL	
Operating Temperature	-20°C ~ 60°C
Storage Temperature	-20°C ~ 70°C
Storage Humidity	10% ~ 95% @40°C non-condensing
Vibration Resistance	Operating Random Vibration Test 5 ~ 500Hz; 2Grms @with SSD, follow IEC 60068-2-64
Shock Resistance	Operating 10 G peak acceleration (11 ms duration), follow IEC 60068-2-27
EMC	CE, FCC Class B
Front Panel Protection	IP65 Compliant

Ordering Information

System I/O										
Model Number	CPU	DisplayPort	HDMI	USB 3.0 / 2.0	GPIO	RS-232	LAN	Wifi / BT	Power	
P150-10AI- N3350	N3350	1	1	4 / 0	1	2	2	Optional	8~24V	
P150-10AI- N4200	N4200	1	1	4 / 0	1	2	2	Optional	8~24V	

Packing List

Packing			
• 1 x Panel PC	• 1 x Mounting Kit	• 1 x US + EU Poower Cord	• 1 x Power Adapter (19V, 65W, DC Jack Type)
• 1 x Screws kit	• 1 x 10 pin Terminal Male Connector	• 1 x Quick Installation Guide	• 1 x 3 pin Terminal Block Power Connector