


OTL173-RPC03-UCD

17" Capacitive Touch Monitor



Features

- 17" Open Frame Touch Monitor
- Supports VGA & DVI-D
- Side & VESA Mountable
- Tempered 10-Point Projected Capacitive Touch Screen
- USB Touch Interface

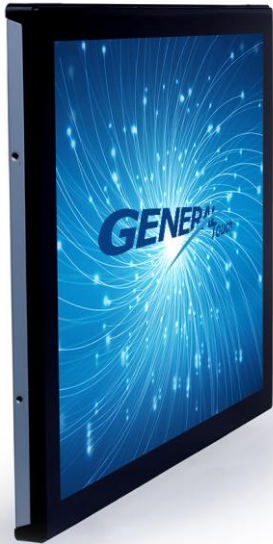

Specifications

Display Type	17" Active Matrix TFT LCD
Bezel Colour	Black
Stand	No stand included
Aspect ratio	5 : 4
Active Display Area	337.920 mm(H) × 270.336 mm(V)
Native Resolution	1280 × 1024 @ 60 Hz
Pixel Response Time	5 ms
Colours	16.7 million
Brightness	250 cd/m ²
Contrast Ratio	1000 : 1
Viewing Angle	Horizontal (left/right): 170° (85°/85°) Vertical (up/down): 160° (80°/80°)
Input Video Format	RGB Analog DVI Video
Input Video Signal Connector	VGA DVI-D
Input Frequency	Horizontal: 30 to 82 kHz Vertical: 50 to 75 Hz
Touch Technology	10-Point Projected Capacitive Touch
Touch Interface	USB
Touch Screen Type	Tempered Anti Reflective (Optional) Anti Glare(Optional)
On Screen Display	Control (Back): Power, Menu, Up, Auto, Down
Power Supply	External Adapter: 100-240 VAC, 50-60 Hz Input Voltage Range: +12V DC ±5%
Input Connector	Coaxial Power Jack (2.5 mm pin diameter, 5.5 mm barrel diameter, 11.5 mm barrel length)
Power Consumption	20 W
Monitor Dimensions	383.72 mm(W) × 315.72 mm(H) × 41 mm(D)
Weight	4.6 kg
Mounting Options	Side Mount VESA Mount (75 & 100 mm)
Sealing	Touchscreen sealed to bezel and LCD panel
Temperature Range	Operating: 0°C to 40°C Storage: -20°C to 60°C
Relative Humidity	Operating: 20% - 80% Storage: 10% - 90%
Warranty	3 years LCD panel: 1 year Touchscreen: 1 year MTBF: 50,000 hours demonstrated (Backlight Lamp Life, Hrs to 1/2 brightness)

*All product specifications and product images are subject to change without notice.