

19" Hover Touch Overlay (HTO-19)



Key Features :

- Contact-Free Upgrade on Touch Maneuvers
- Plug & Play Design for Multiple Platforms
- Haptic Design: LED, Sound, Visual (GUI)
- Supports Portrait & Landscape Modes
- Omni-Industry Application
- Access to Customer Education Graphics Library

Specifications


Touch Type	Hover (Air) Touch
Size Support	19" 5:4
Response Time	125RPS (30ms touch / 12ms draw)
Haptic Feedback	LED / Visual / Sound visual haptic (GUI) will be provided upon request
Interface	USB 2.0 HID
Input Method	Finger / Gloved / Stylus (7mm+)
Operating Voltage	DC 5V±5% (via USB)
OS Support	Windows / Linux / Android
Certifications	CE / FCC class B
Mounting	Tape Mount / Screw Mount
Application	Indoor / Semi-Outdoor

Order Information


Part Number	Description
HTO-19-H3U	19" 5:4 hover frame / 3-tier haptic design: LED + visual + sound / USB2.0 Type B connectivity (180cm) / enhanced IR sensor arrays / proprietary light filter / metallic black coating finish
HTO-Mount-L1	L shape screw mount bracket / 2CM height / 16 screw points to surface / 8 screw points to HTO
HTO-Mount-L2	L shape tape mount bracket / 2CM height / 175cm ² tape contact surface / 8 screw points to HTO
HTO Tailored Services	
Calibration Service	Remote touch calibration service can be requested
Custom Service 1	Color customization with MOQ = 200 units
Custom Service 2	Bracket customization without MOQ

Dimension

Unit: mm

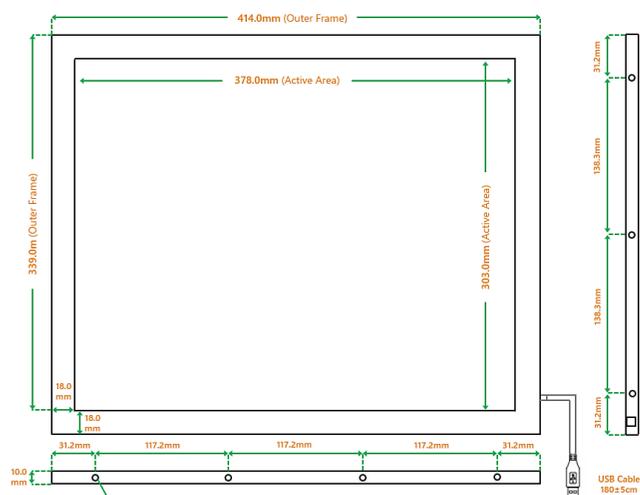

Mechanical Design

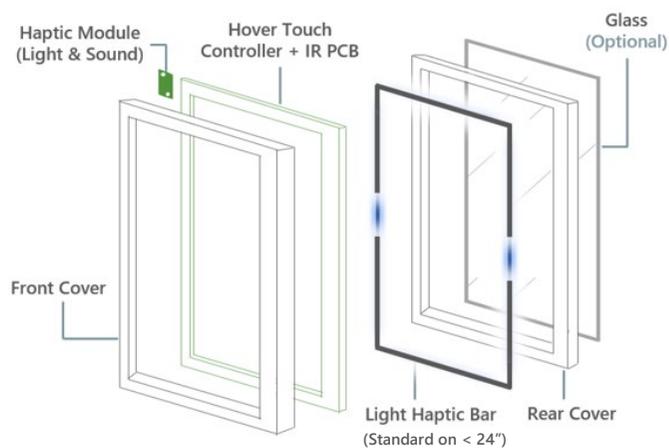

INNOVATION IN AI & IOT DESIGNS

KOGI Corporation | Address: 7F-1 #335 Ruiguang Road, Neihu Dist., Taipei, Taiwan R.O.C.

Phone #: +886-2-2799-8808 | Web: <https://www.kogicorp.com> | Email: inquiry@kogicorp.com



VISIT OUR WEBSITE