


21.5" Hover Touch Overlay (HTO-21)

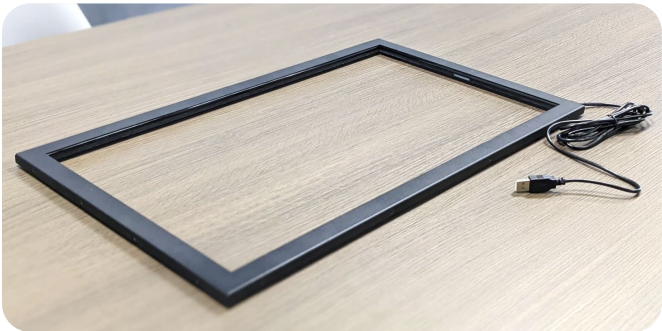

Key Features :

- Contact-Free Upgrade on Touch Maneuvers
- Plug & Play Design for Multiple Platforms
- Haptic Design: LED, Sound, Visual (GUI)
- Supports Portrait & Landscape Modes
- Omni-Industry Application
- Access to Customer Education Graphics Library

Specifications


| | |
|-------------------|---|
| Touch Type | Hover (Air) Touch |
| Size Support | 21.5" 16:9 |
| Response Time | 125RPS (30ms touch / 12ms draw) |
| Haptic Feedback | LED / Visual / Sound visual haptic (GUI) will be provided upon request |
| Interface | USB 2.0 HID |
| Input Method | Finger / Gloved / Stylus (7mm+) |
| Operating Voltage | DC 5V±5% (via USB) |
| OS Support | Windows / Linux / Android |
| Certifications | CE / FCC class B |
| Mounting | Tape Mount / Screw Mount |
| Application | Indoor / Semi-Outdoor |

Order Information


| Part Number | Description |
|-----------------------|---|
| HTO-21-H3U | 21.5" 16:9 hover frame / 3-tier haptic design: LED + visual + sound / USB2.0 Type B connectivity (180cm) / enhanced IR sensor arrays / proprietary light filter / metallic black coating finish |
| HTO-Mount-L1 | L shape screw mount bracket / 2CM height / 16 screw points to surface / 8 screw points to HTO |
| HTO-Mount-L2 | L shape tape mount bracket / 2CM height / 175cm ² tape contact surface / 8 screw points to HTO |
| HTO Tailored Services | |
| Calibration Service | Remote touch calibration service can be requested |
| Custom Service 1 | Color customization with MOQ = 200 units |
| Custom Service 2 | Bracket customization without MOQ |

Dimension

Unit: mm

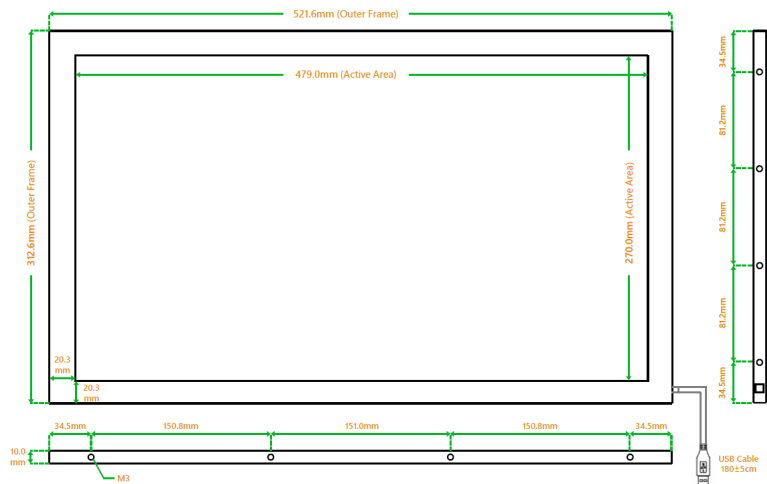

Mechanical Design

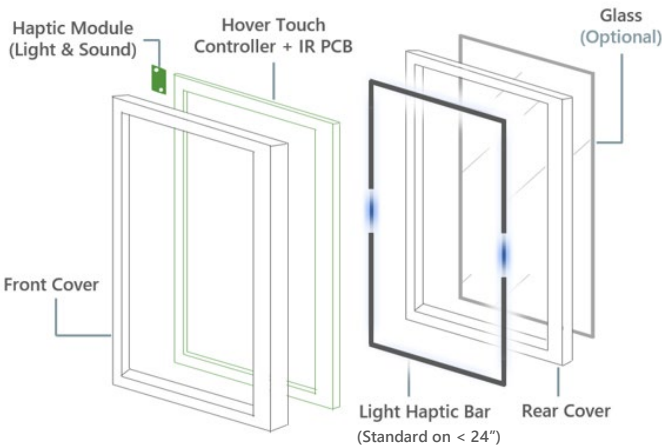

INNOVATION IN AI & IOT DESIGNS

KOGI Corporation | Address: 7F-1 #335 Ruiguang Road, Neihu Dist., Taipei, Taiwan R.O.C.
Phone #: +886-2-2799-8808 | Web: <https://www.kogicorp.com> | Email: inquiry@kogicorp.com



VISIT OUR WEBSITE