


PPC-IN08-J19

8" Industrial Panel PC



Features

- 8.4" TFT LED with Resistive Touch
- Intel Celeron Quad Core J1900 2.0GHz
- 1x DDR3L 1333MHz 4GB. Max up to 8GB
- Multi ports for option: VGA/HDMI/LAN/USB/COM
- DC 12V-24V Input, (+9V ~ 36V) wide voltage input optional
- -20°C ~ 70°C extended operating temperature
- IP65 Compliant Front Panel

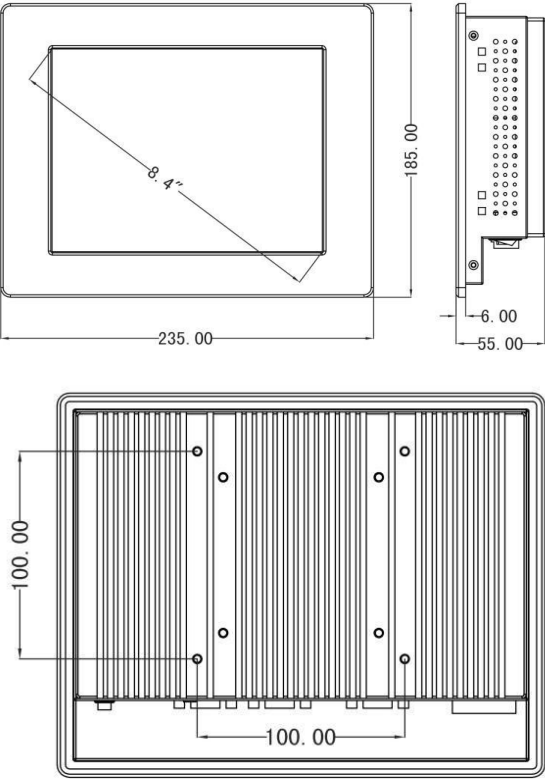

Specifications

CPU	Intel Celeron Quad Core J1900 2.0GHz
L2 Cache	2MB
Chipsets	Intel Bay Trail SOC
Memory	DDR3L 1333MHz 4GB, Up to 8GB
Hard Disk	1 x mSATA 32G SSD (Optional: 64G 128G 250G 500G)
Graphics	Intel HD Graphics
Network	Intel 82583V 1000 Mbps Port
Audio	Realtek ACL662 Audio Controller
Operation System	Windows 7 8 10, Linux, Unix, QNX
I/O	1x VGA 1x HDMI 3x USB 2.0 1x USB 3.0 1x LAN WIFI & Bluetooth (Optional) 1x Power Switch
Panel Size	8.4" 5 Wire Resistive Touch (800 x 600) LED
Aspect Ratio	4:3
Display Brightness	450 cd/m2
Contrast Ratio	600:1
Response Time	20/10 (Typ.)(Tr/Td) ms
Viewing Angle	80 / 80 / 80 / 60 (CR≥10) (L / R / U / D)
Transmittance	>85%
Response Time	<5ms
Surface Hardness	≥3H
Supply Voltage	5.0V DC
Touch Life	≥ 1000W
Material	Aluminum Alloy Panel Sheet Metal (Back Cover) Baking Varnish Treated
Color	Silver Black (Optional)
VESA Mounting	100 x 100mm
Waterproof Rate	IP65
Product Dimensions	235 x 185 x 55 mm
Cut-out Size	221 x 171 mm
Packing Size	360 x 180 x 320 mm
Gross Weight	4,0 Kg
Operating Temperature	-20~70°C
Storage Temperature	-20~80°C(-22~176°F)
Relative Humidity	5%~95%@40°C, non-condensing
Vibration Range	5-500 Hz, 0.026 G2/Hz, 2.16 Grms, X Y Z 1 Hour per axis
External Power Supply	AC 100 - 240V~50/60Hz,1.5A
Working Voltage	DC 12V~24V / Optional (+9V~36V)
Power Consumption	≤30W

*All product specifications and product images are subject to change without notice.