


PPC-IN101-J64

10.1" Industrial Panel PC



Features

- 10.1" TFT LED Multi-Touch PCAP
- Intel Celeron J6412 Quad-core 2.0GHz
- 1x DDR4L 3200MHz 8GB
- 3xLAN, 2xRS232/422/485, Static Electricity & S Surge Protection
- Built-in TPM2.0 for Hardware-based Security
- Wide voltage DC 9V~36V, with Overcurrent, Overvoltage and Reverse Connection Protection
- -20°C ~ 70°C Extended Operating Temperature
- IP66 Compliant Front Panel

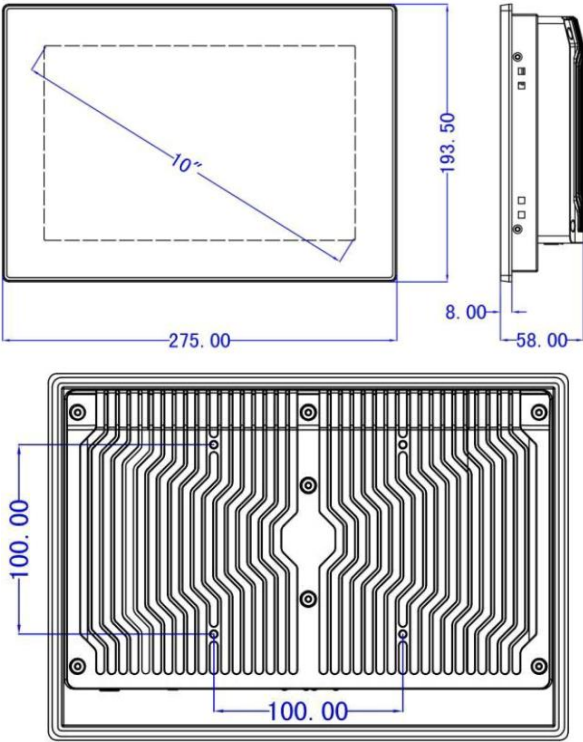

Specifications	
CPU	Intel® Elkhart Lake Celeron J6412 Quad-core 2.0GHz, TDP 10W
L2 Cache	1.5 MB
Chipsets	Integrated with Intel® SoC
Memory	DDR4L 3200MHz 8GB
Hard Disk	1 x M.2 256G SSD
Graphics	Intel® UHD Graphics for 10th Gen Intel® Processors
Network	Intel® 225-V GbE LAN
Audio	Realtek ACL897 Audio Controller
TPM	TPM 2.0
Watchdog Timer	Software Programmable Supports 1~255 sec. System Reset
Operation System	Windows 10 11, Linux, Ubuntu
I/O	1x HDMI 4x USB 3.0 3x LAN 2 x RS-232/422/485 4G,WIFI & Bluetooth (Optional) 1x Audio_out & Mic_in
Panel Size	10.1" 10 Point Capacitive Touch (1280 x 800) FHD LED
Aspect Ratio	16:10
Display Brightness	400 cd/m2
Contrast Ratio	900:1
Backlight Lifetime	30000 Hr (min.)
Viewing Angle	85 / 85 / 85 / 85 (CR≥10) (L / R / U / D)
Surface Hardness	≥7H
Supply Voltage	5.0V DC
Touch Life	≥ 3000W
Material	Aluminum Alloy Panel, Anodized Treatment
Mounting	Stand Wall VESA Panel
Product Dimensions	275 x 194 x 58 mm
Cut-out Size	263 x 182 mm
Packing Size	360 x 180 x 320 mm
Gross Weight	2.5 kg
Operating Temperature	-20~70°C
Storage Temperature	-30~80°C(-22~176°F)
Relative Humidity	5%~95%@40°C, non-condensing
Vibration Range	1.5 Grms, IEC 60068-2-64, Random, 5~500 Hz, 1 hr/axis
Power Adapter	1 x Optional AC/DC 12V/5A , 60W
Power Mode	Support AT, ATX Mode
Power Input	2-pin Terminal Block Connector with Power Input 9~36 VDC
Power Protection	OVP (Over Voltage Protection) OCP (Over Current Protection) RPP (Reverse Polarity Protection)
Power Consumption	≤30W
*All product specifications and product images are subject to change without notice.	