


LCD-IN10-IP65-R

10" Industrial LCD Monitor



Features

- 10.4" TFT LED with Resistive Touch
- Embedded / VESA mounting
- HDMI/VGA/DVI multiple signals input supported
- DC12V~24V Input (Wide Voltage)
- -20°C ~ 70°C extended operating temperature
- IP65 Compliant Front Panel

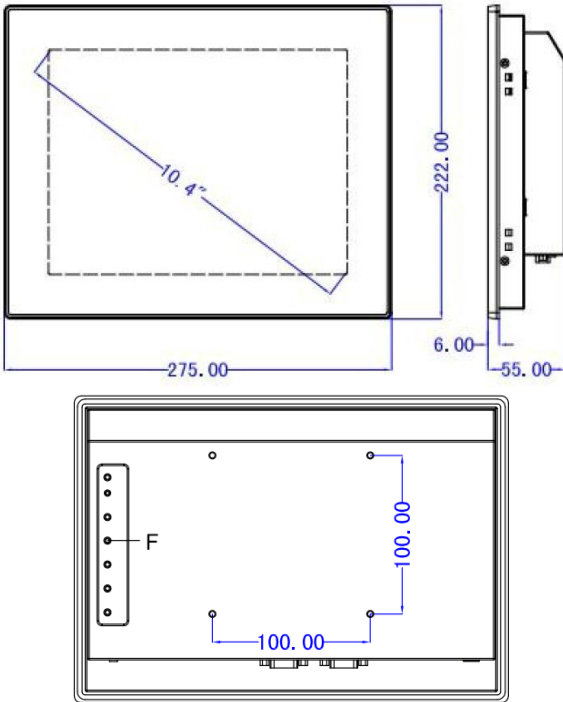

Specifications

Panel Size	10.4" Resistive Touch LED
Resolution	800 x 600
Aspect Ratio	4:3
Display Brightness	350 cd/m2
Contrast Ratio	800:1
Colors	16.7M , 74% NTSC
Backlight Lifetime	30000 Hr (min.)
Viewing Angle	80 / 80 / 65 / 75 (CR≥10) (L / R / U / D)
Transmittance	>90%
Response Time	<5ms
Surface Hardness	≥7H
Supply Voltage	5.0V DC
Touch Life	≥ 3000W
I/O	1x HDMI 1x VGA 1x DVI 1x Touch USB 1x OSD Control Key
Material	High-strength Al-alloy
Color	Grey
VESA Mounting	100 x 100mm
Waterproof Rate	IP65 IP66
Product Dimensions	275 x 222 x 55 mm
Cut-out Size	263 x 210 mm
Packing Size	360 x 180 x 320 mm
Gross Weight	4.0 Kg
Operating Temperature	-20~70°C
Storage Temperature	-30~80°C(-22~176°F)
Relative Humidity	5%~95%@40°C, non-condensing
Vibration Range	5-500 Hz, 0.026 G2/Hz, 2.16 Grms, X Y Z 1 Hour per axis
External Power Supply	AC 100 - 240V~50/60Hz,1.5A
Working Voltage	DC12V~24V Input (Wide Voltage)

*All product specifications and product images are subject to change without notice.