




# LCD-IN19-IP65

## 19" Industrial LCD Monitor

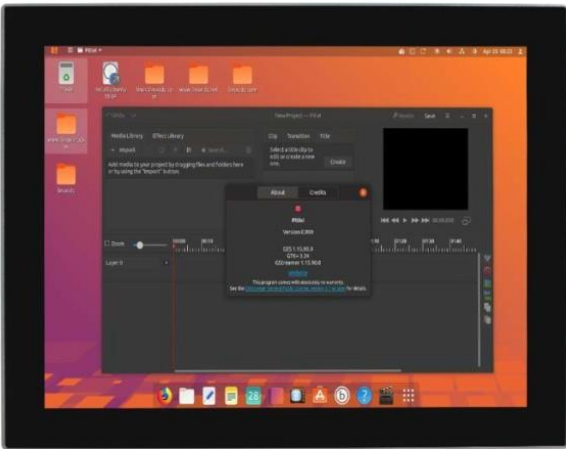

### Features

- 19" TFT LED with PCAP Touch
- Embedded / VESA mounting
- HDMI/VGA/DVI multiple signals input supported
- DC12V~24V Input (Wide Voltage)
- -20°C ~ 70°C extended operating temperature
- IP65 Compliant Front Panel

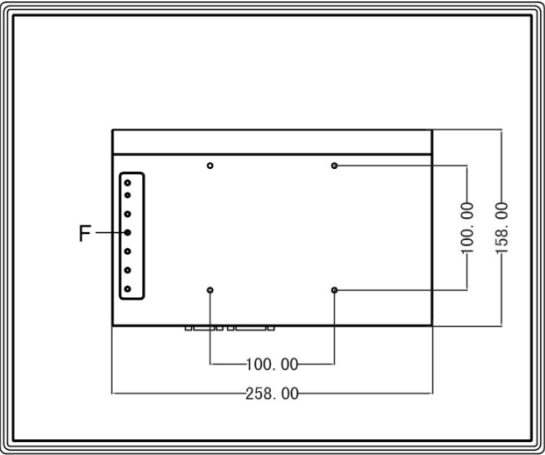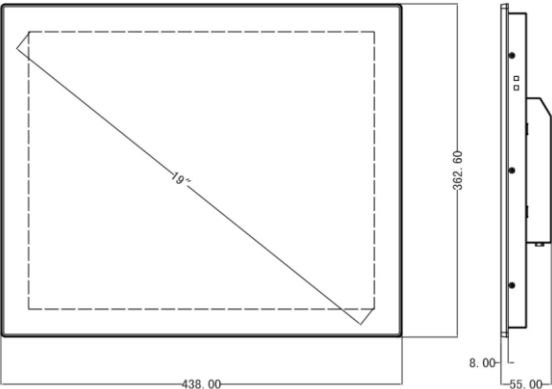

### Specifications

|                       |                                                               |
|-----------------------|---------------------------------------------------------------|
| Panel Size            | 19" Multi-Touch Capacitive Touch LED                          |
| Resolution            | 1280 x 1024                                                   |
| Aspect Ratio          | 5:4                                                           |
| Display Brightness    | 450 cd/m2                                                     |
| Contrast Ratio        | 1000:1                                                        |
| Colors                | 16.7M , 74% NTSC                                              |
| Backlight Lifetime    | 50000 Hr (min.)                                               |
| Viewing Angle         | 85 / 85 / 80 / 80 (CR≥10) ( L / R / U / D )                   |
| Transmittance         | >90%                                                          |
| Response Time         | <5ms                                                          |
| Surface Hardness      | ≥6H                                                           |
| Supply Voltage        | 5.0V DC                                                       |
| Touch Life            | ≥ 3000W                                                       |
| I/O                   | 1x HDMI   1x VGA   1x DVI   1x Touch USB   1x OSD Control Key |
| Material              | High-strength Al-alloy                                        |
| Color                 | Grey                                                          |
| VESA Mounting         | 100 x 100mm                                                   |
| Waterproof Rate       | IP65                                                          |
| Product Dimensions    | 438 x 362 x 55 mm                                             |
| Cut-out Size          | 420 x 345 mm                                                  |
| Packing Size          | 500 x 180 x 450 mm                                            |
| Gross Weight          | 8.0 Kg                                                        |
| Operating Temperature | -20~70°C                                                      |
| Storage Temperature   | -30~80°C(-22~176°F)                                           |
| Relative Humidity     | 5%~95%@40°C, non-condensing                                   |
| Vibration Range       | 5-500 Hz, 0.026 G2/Hz, 2.16 Grms, X Y Z 1 Hour per axis       |
| External Power Supply | AC 100 - 240V~50/60Hz,1.5A                                    |
| Working Voltage       | DC12V~24V Input (Wide Voltage)                                |

\*All product specifications and product images are subject to change without notice.