



I-8040W | I-8040PW | I-8040W-A1

32-channel Isolated Digital Input Module

Features

- 32 Wet Contact Digital Input Channels
- Support Sink/Source Type Digital Input
- Photocouple Isolation Protection
- Channel Status LED Indicators
- 4 kV ESD Protection
- 3750 Vrms Intra-module Isolation



Introduction

The I-8040W, I-8040W-A1 and I-8040PW offer 32 channels for Digital Input, each of which features Photocouple-isolation. Either Sink Type or Source Type Input can be selected via wire connections. All channels ± 4 kV ESD protection and 3750 VDC intra-module isolation. Paired with a daughter board such as the DN-37-381-A CR, wiring is easier than ever. The I-8040W, I-8040W-A1 and I-8040PW is suitable for +24 VDC Digital Input systems and provides noise protection capabilities that enhance noise immunity in industrial environments. ICP DAS recommends selecting the "P" version of the Digital Input Module for industrial use.



I-8040W, I-8040W-A1 and I-8040PW with DN-37-381-A and DB37 Male to Female Cable (Optional)


System Specifications

Model	I-8040W	I-8040PW	I-8040W-A1
LED Indicators/Display			
System LED Indictors	1 LED as Power Indicator		
I/O LED Indicators	32 LEDs as Digital Input Indicators		
Isolation			
Intra-module Isolation, Field-to-Logic	3750 Vrms		
EMS Protection			
ESD (IEC 61000-4-2)	±4 kV Contact for each Terminal		
Power			
Power Consumption	0.65 W Max.	1 W Max.	0.65 W Max.
Mechanical			
Dimensions (W x L x H)	30 mm x 114 mm x 85 mm		
Environment			
Operating Temperature	-25 ~ +75 °C		
Storage Temperature	-40 ~ +85 °C		
Humidity	10 ~ 90 % RH, Non-condensing		


I/O Specifications

Model	I-8040W	I-8040PW	I-8040W-A1
Digital Input			
Channels	32		
Type	Wet Contact		
Sink/Source (NPN/PNP)	Sink, Source		
ON Voltage Level	+10 ~ +30 VDC	+19 ~ +30 VDC	+3.5 ~ +30 VDC
Off Voltage Level	+4 VDC Max.	+11 VDC Max.	<+1 VDC Max.
Input Impedance	3 k Ω , 0.5 W		
Low Pass Filter	-	Yes	-


Pin Assignments

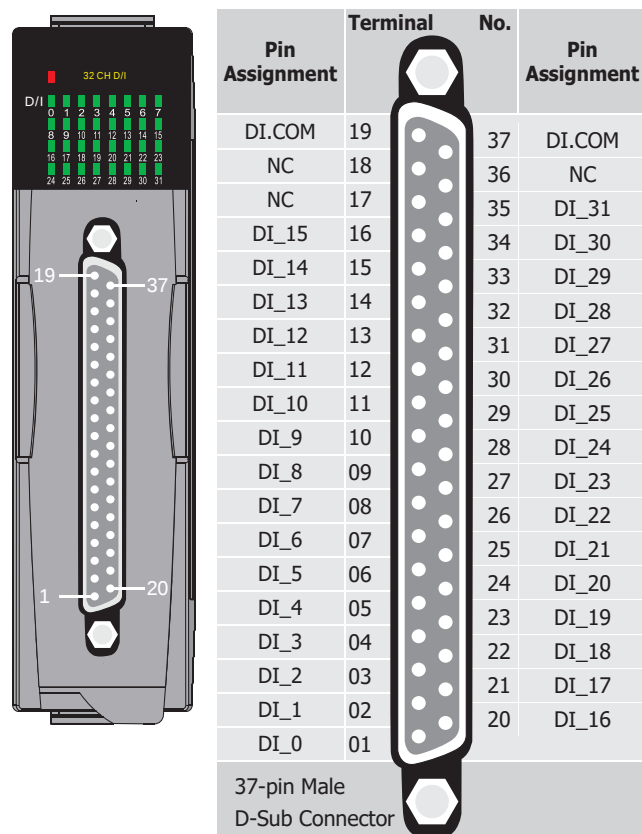

Internal I/O Structure

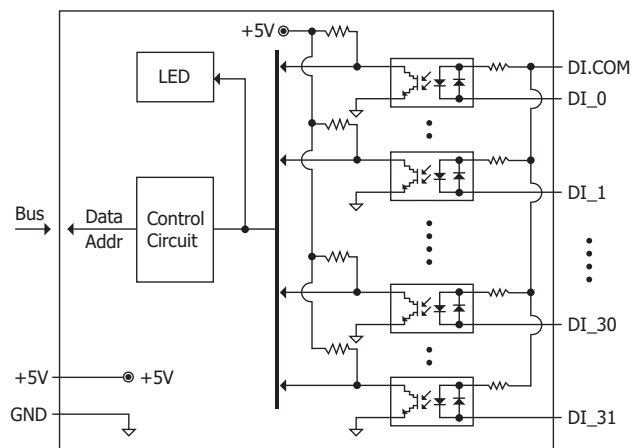

Dimensions (Units: mm)

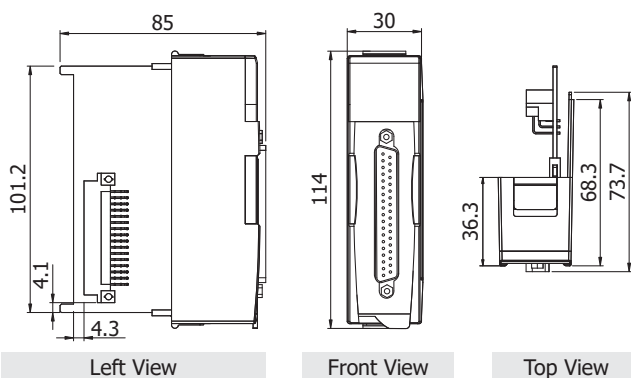

Wire Connections

Digital Input/Counter		ON State Readback as 0
		Sink
I-8040W	+10 ~ +30 VDC	
I-8040W-A1		
I-8040PW	+19 ~ +30 VDC	
Digital Input/Counter		OFF State Readback as 1
		Source
I-8040W	+10 ~ +30 VDC	
I-8040W-A1		
I-8040PW	+19 ~ +30 VDC	

Accessories

DN-37-A CR



Female DB37 to Screw Terminal Board (Pitch = 5.08 mm) with DIN-rail Mounting (RoHS)
Include: CA-3710A (DB37 Male to Female Cable, 90°, 1 M)

DN-37-381-A CR



Female DB37 to Screw Terminal Board (Pitch = 3.81 mm) with DIN-rail Mounting (RoHS)
Include: CA-3710A (DB37 Male to Female Cable, 90°, 1 M)

CA-3705A CR/CA-3710A/CA-3715A CR



DB37 Male to Female Cable, 90°, 0.5 M/1 M/1.5 M (RoHS)

CA-3710AM/CA-3720AM/CA-3730AM/CA-3750AM/CA-37100AM CR



DB37 Male to Female, with Molded Cable, 45°, 1 M/2 M/3 M/5 M/10 M (RoHS)

Ordering Information

I-8040W-G CR	32-channel Isolated DI (Wet, 10~30 VDC) Module (RoHS)
I-8040PW-G CR	32-channel Isolated DI (Wet, 10~30 VDC) Module with Low Pass Filter (RoHS)
I-8040W-A1-G CR	32-channel Isolated DI (Wet, 3.5~30 VDC) Module (RoHS)