


LCD-IN24-IP65-SS

23.8" Industrial LCD Monitor



Features

- Aluminium alloy front panel, front IP66 waterproof
- 23.8" TFT LED, Resolution 1920x1080, 10 Points PCAP Touch
- Embedded / VESA mounting
- HDMI/VGA/DVI Multiple Signals Input Supported
- DC12V Input, Optional (+9V~36V)

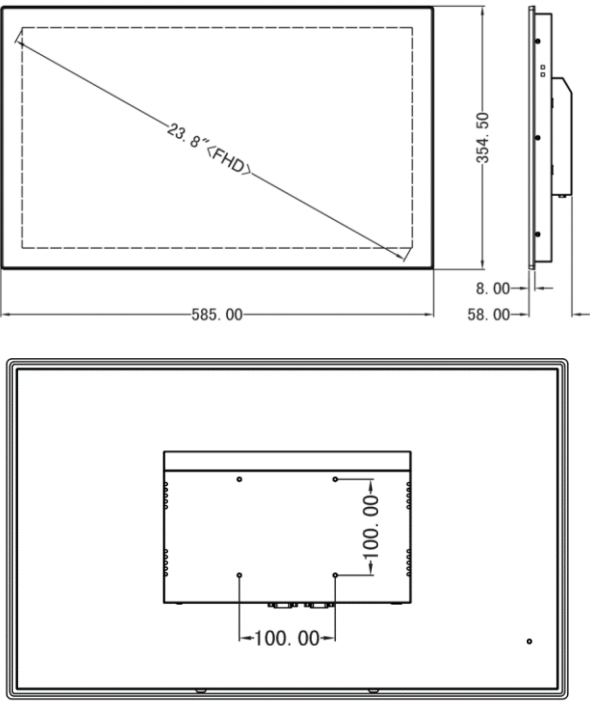

Specifications

Panel Size	23.8" Multi-Touch Capacitive Touch FHD LED
Resolution	1920 x 1080
Aspect Ratio	16:9
Display Brightness	350 cd/m2
Contrast Ratio	1000:1
Colors	16.7M , 74% NTSC
Backlight Lifetime	30000 Hr (min.)
Viewing Angle	89 / 89 / 89 / 89 (CR≥10) (L / R / U / D)
Transmittance	>90%
Response Time	<5ms
Surface Hardness	≥6H
Supply Voltage	5.0V DC
Touch Life	≥ 3000W
I/O	1x HDMI 1x VGA 1x DVI 1x Touch USB 1x Power Switch
Material	Stainless Steel Panel & Sheet Metal Painting Treated Back Shell
Color	Natural
VESA Mounting	100 x 100mm
Waterproof Rate	IP65 IP66
Product Dimensions	585 x 355 x 58 mm
Cut-out Size	568 x 337 mm
Packing Size	730 x 200 x 530 mm
Gross Weight	18.0 Kg
Operating Temperature	-20~70°C
Storage Temperature	-30~80°C(-22~176°F)
Relative Humidity	5%~95%@40°C, non-condensing
Vibration Range	5-500 Hz, 0.026 G2/Hz, 2.16 Grms, X Y Z 1 Hour per axis
External Power Supply	AC 100 - 240V~50/60Hz,1.5A
Working Voltage	DC 12V / Optional (+9V~36V)

*All product specifications and product images are subject to change without notice.