


PPC-IN133-I5-8G-256G-P10
13.3" Industrial Panel PC



Features

- Aluminium Alloy Front Panel, Front IP66 Waterproof
- 13.3" TFT LCD, Resolution 1920*1080, Capacitive / Resistive Touch
- 10th Gen Intel Core i5-10210U 1.6GHz Industrial Panel PC
- 2xLAN, 2xCOM, Static Electricity & S Surge Protection
- Built-in TPM2.0 for Hardware-based Security
- DC 9~36V, Overcurrent, Overvoltage & Reverse Connection Protection

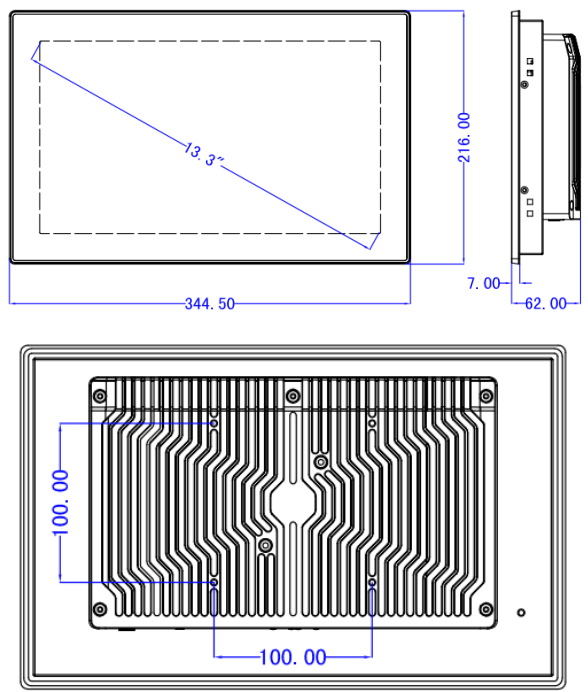

Specifications

CPU	Intel Core i5-10210U Quad Core 1.6GHz
L2 Cache	6MB
Memory	DDR4L 2400MHz 8GB
Hard Disk	1 x mSATA 256G SSD
Graphics	Intel HD Graphics 620
Network	Intel® I211-AT GbE LAN
Audio	Realtek ACL662 Audio Controller
TPM	TPM 2.0
Operation System	Windows 10 11, Linux, Ubuntu, Debian
I/O	1x HDMI 3x USB 3.0 1x USB 2.0 2x LAN 2 x RS-232/422/485 4G,WIFI & Bluetooth (Optional) 1x Power Switch 1x Audio_out & Mic_in
Panel Size	13.3" Multi-Touch Projected Capacitive LED Screen (1920 x 1080)
Aspect Ratio	16:9
Display Brightness	400 cd/m2
Contrast Ratio	900:1
Backlight Lifetime	50000 Hr (min.)
Viewing Angle	85 / 85 / 85 / 85 (CR≥10) (L / R / U / D)
Transmittance	>90%
Response Time	<5ms
Surface Hardness	≥7H
Supply Voltage	5.0V DC
Touch Life	≥ 3000W
Material	High-strength Al-alloy
Color	Grey
VESA Mounting	100 x 100mm
Waterproof Rate	IP66
Product Dimensions	344.50 x 216 x 62 mm
Cut-out Size	331 x 203 mm
Packing Size	450 x 170 x 350 mm
Gross Weight	5.0 Kg
Operating Temperature	-20~70°C
Storage Temperature	-30~80°C(-22~176°F)
Relative Humidity	5%~95%@40°C, non-condensing
Vibration Range	5-500 Hz, 0.026 G2/Hz, 2.16 Grms, X Y Z 1 Hour per axis
External Power Supply	AC 100 - 240V~50/60Hz,1.5A
Working Voltage	DC IN 9V~36V
Power Consumption	≤35W

*All product specifications and product images are subject to change without notice.