



PPC-IN19-I5-69K

19" Industrial Panel PC



Features

- 19" TFT LED Waterproof Computer, Multi-Touch PCAP
- Intel Core i5-6200U Dual Core 2.5GHz
- 1x DDR4L 2133MHz 4GB, Up to 16GB
- Multi ports optional: HDMI/LAN/USB/COM
- Full system IP69K Aluminum Alloy Shell
- DC12V~24V Input (+9V~36V wide voltage optional)
- -20°C ~ 70°C extended operating temperature

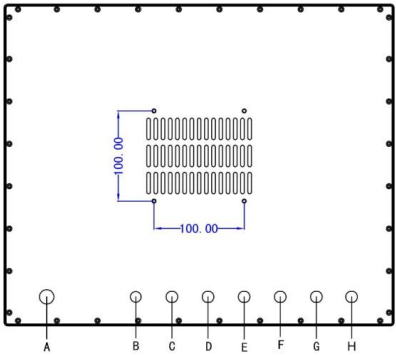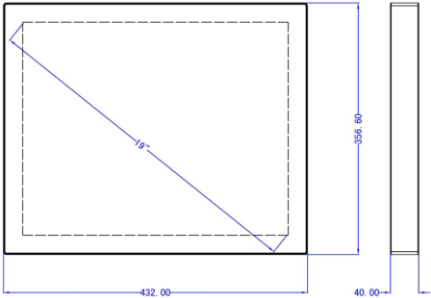

Interface Definition:

- A: Power Switch
B: Breather Valve
C: COM (optional)
D: COM (optional)
E: USB (optional)
F: USB (optional)
G: LAN (optional)
H: DC 12V-24V

Specifications

CPU	Intel Core i5-8265U Quad Core 3.9GHz
L2 Cache	6MB
Chipsets	Integrated with Intel® SoC
Memory	DDR4L 2133MHz 4GB, Up to 16GB
Hard Disk	1 x mSATA 128G SSD (Optional: 64G 128G 250G 500G)
Graphics	Intel HD Graphics 520
Network	Intel® I211-AT GbE LAN
Audio	Realtek ACL662 Audio Controller
Operation System	Windows 7 8 10, Linux, Unix, QNX
I/O	1x HDMI 4x USB 2x LAN 2 x RS-232 4G,WIFI & Bluetooth 1x Power Switch ** ALL I/O Ports Optional
Panel Size	19" 10-Point Capacitive Touch LED Screen (1280x1024)
Aspect Ratio	4:3
Display Brightness	450 cd/m2
Contrast Ratio	1000:1
Backlight MTBF	50 000 hrs
Viewing Angle	89 / 89 / 89 / 89 (CR≥10) (L / R / U / D)
Surface Hardness	≥7H
Supply Voltage	5.0V DC
Touch Life	≥ 3000W
Material	Aluminum Alloy Shell
Mounting	Stand / Wall / VESA / Yoke
Waterproof Rate	IP66 IP69K
Product Dimensions	432 x 356.6 x 40 mm
Cut-out Size	N/A
Packing Size	460 x 180 x 400 mm
Gross Weight	6.5 Kg
Operating Temperature	-20~70°C
Storage Temperature	-30~80°C(-22~176°F)
Relative Humidity	5%~95%@40°C, non-condensing
Vibration Range	5-500 Hz, 0.026 G2/Hz, 2.16 Grms, X Y Z 1 Hour per axis
Power Adapter	1 x Optional AC/DC 12V/5A , 60W
Power Input	DC 12V~24V
Power Consumption	≤30W

*All product specifications and product images are subject to change without notice.