

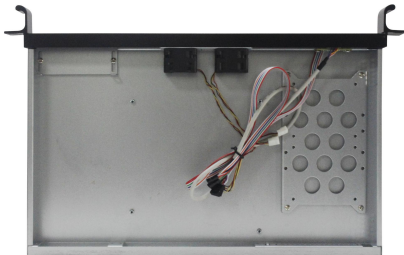
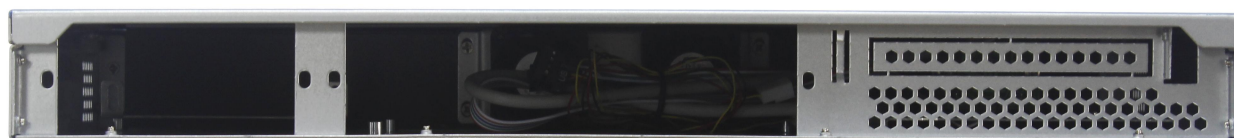


1U255

Generality	Metal material	SGCC	
	Metal thickness	1.0mm	
	Panel material	Aluminium	
M/B support	mini ITX		
Size	D*W*H(mm)	255*430*44	
	D*W*H(inch)	10"*16.9"*1.7'	
Drive Bay	3.5"/2.5"HDD	1*3.5"/2*2.5"	
	Slim CD-ROM	0	
	Slim FDD	0	
Power support	Normal 1U/Flex 1U		
Front panel	control button	power on/off / reset	
	indicator	power status / HDD Activity / Lan Activity	
	I/O ports	USB(2.0*2)	
Expansion	I/O Shield (optional)		
	1 horizontal slots		
	Riser card(optional)		
Backplane	0		
System cooling	Front	2*4025	
Applications	1.security servers, VOD servers 2.Web servers(website/email/fire wall/VPN/storage) 3.online game server(DB/Game/Gate/Log-in/web/SQL) 4.high server group 5.NAS and SAN		

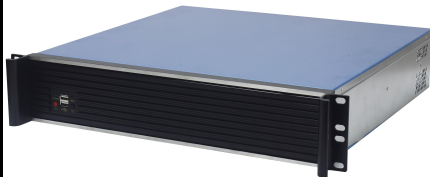

2U420

Generality	Metal material	SGCC	
	Metal thickness	1.0mm	
	Panel material	Aluminium	
M/B support	ATX(12"x9.6")		
Size	D*W*H(mm)	420*430*88	
	D*W*H(inch)	16.5"*16.9"*3.5"	
Drive Bay	3.5"/2.5"HDD	6*3.5"+3*2.5"	
	Slim CD-ROM	0	
	Slim FDD	0	
Power support	Normal 1U/2U/ATX		
Front panel	control button	power on/off / reset	
	indicator	power status / HDD Activity / Lan Activity	
	I/O ports	USB(2.0*2)	
	4 *half length slots(max=7)		
Backplane	0		
System cooling	Front	2*8025	
Applications	1.security servers, VOD servers 2.Web servers(website/email/fire wall/VPN/storage) 3.online game server(DB/Game/Gate/Log-in/web/SQL) 4.high server group 5.NAS and SAN		

