


PPC-IWR

Industrial Panel PC Series

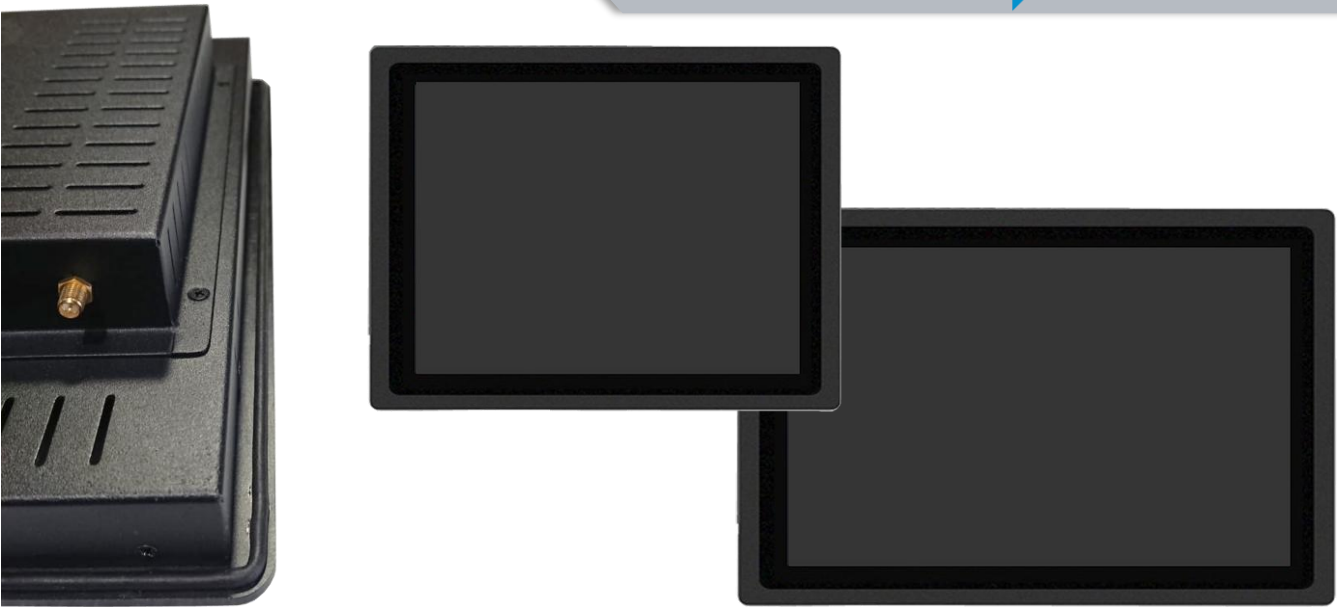

Specifications						
		PPC-IWR10	PPC-IWR12	PPC-IWR15	PPC-IWR17	PPC-IWR19
System	CPU	Supports Intel Alder Lake-N, N200、N100、N97、N95、i3-N305,etc. Supports Intel ® Processor: Celeron J6412/J6413/N6210/N6211, Pentium J6426/N6415				
	DDR	Supports 2GB 4GB 8GB 16GB RAM 1*NB-DDR4 SODIMM, 3200MHz (Not Included)				
	Storage	Supports 32GB 64GB 128GB 256GB 512GB 1T 2T SSD (Not Included)				
	Operation System	Support Windows 11, Windows 10, Linux OS				
	Touch screen	10-Point Projected Capacitive Touch				
Display	Screen	10.4" LCD Screen	12.1" LCD Screen	15" LCD Screen	17" LCD Screen	19" LCD Screen
	Resolution	1024 x 768 (4:3)	1024 x 768 (4:3)	1024 x 768 (4:3)	1280 x 1024 5:4)	1280 x 1024 (5:4)
	Front Bezel	5mm Ultra-thin Front Bezel with Rubber Seal Slot Rubber Seal (Optional) – Seals from dust and water				
	Color	16.7M				
	Contrast ratio	1000:1				
	Luminance	250 ~ 350 nits				
Network	WIFI	802.11b/g/n/ac				
	Ethernet	100M/1000M Ethernet				
Interface	Inputs	DC Input 4x USB 1x MIC 1x RJ45 1x HDMI Audio Input & Output				
Others	Wall mounting	VESA 75x75mm & 100 x 100mm				
	Panel Mounting	Panel mountable on all 4 sides of PPC				
	Speaker	2 x 3W				
	Language	Multi-language				
	Working temperature	-10℃~60℃				
	Storage Temperature	-20℃ -- 70 °℃				
	Power	12V 5A				
	Materials	Metal Case, Black				

*All product specifications and product images are subject to change without notice.

Specifications (Wide Screen Options)

		PPC-IWR156	PPC-IWR215
System	CPU	Supports Intel Alder Lake-N, N200, N100, N97, N95, i3-N305,etc. Supports Intel® Processor: Celeron J6412/J6413/N6210/N6211, Pentium J6426/N6415	
	DDR	Supports 2GB 4GB 8GB 16GB RAM 1*NB-DDR4 SODIMM, 3200MHz (Not Included)	
	Storage	Supports 32GB 64GB 128GB 256GB 512GB 1T 2T SSD (Not Included)	
	Operation System	Support Windows 11, Windows 10, Linux OS	
	Touch screen	10-Point Projected Capacitive Touch	
Display	Screen	15.6" (16:9) 1920 x 1080	21.5" (16:9) 1920 x 1080
	Front Bezel	5mm Ultra-thin Front Bezel with Rubber Seal Slot Rubber Seal (Optional) – Seals from dust and water	
	Color	16.7M	
	Contrast ratio	1000:1	
	Luminance	250 ~ 350 nits	
Network	WIFI	802.11b/g/n/ac	
	Ethernet	100M/1000M Ethernet	
Interface	Inputs	DC Input 4x USB 1x MIC 1x RJ45 1x HDMI Audio Input & Output	
Others	Wall mounting	VESA 75x75mm & 100 x 100mm	
	Panel mounting	Panel mountable on all 4 sides of PPC	
	Speaker	2 x 3W	
	Language	Multi-language	
	Working temperature	-10°C~60°C	
	Storage Temperature	-20°C -- 70 °C	
	Power	12V 5A	
	Materials	Metal Case, Black	

*All product specifications and product images are subject to change without notice.

Ordering Information

Screen Size	N100 CPU P-CAP Touch 0G RAM 0G SSD	12 th GEN CPU P-CAP Touch 0G RAM 0G SSD (Spec Coming Soon)
10.4" 12" 15" 17" 19"	PPC-IWR10-N100 PPC-IWR12-N100 PPC-IWR15-N100 PPC-IWR17-N100 PPC-IWR19-N100	PPC-IWR10-I5-12th PPC-IWR12-I5-12th PPC-IWR15-I5-12th PPC-IWR17-I5-12th PPC-IWR19-I5-12th
15.6" 21.5"	PPC-IWR156-N100 PPC-IWR215-N100	PPC-IWR156-I5-12th PPC-IWR215-I5-12th

