


SHIELD-1U-8L-2(40G)SFP-C612-Xe

Firewall System



Features

- Intel® Xeon E5 2699V4 Processor
- 8x RJ45 2.5G | 2x QSFP+ 40G
- 2x SODIMM DDR4 64GB in total
- 2x M.2 SSD NVME 2TB in total
- 2x SATA Slots | 4x USB3.0 ports
- 1x VGA output | 1x Console RJ45
- 1*SIM slot support LTE module
- Support MikroTik/Linux/pfSense/OPNsense

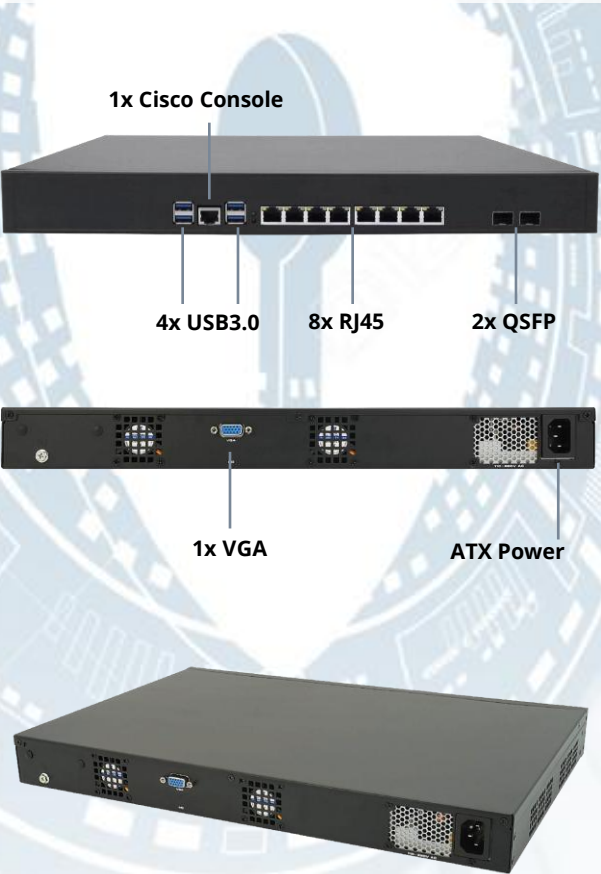

Specifications

Processor	Intel® Xeon E5 2699V4 22 Core 44 Thread 2.2GHz Turbo 3.6GHz
Chip	Intel® C612, TDP 145W
Memory	2x SODIMM DDR4 Maximum Support 64GB
Storage	2x M.2 NVME Maximum Support 4TB
Expansion	1x SIM Slot for 4G LTE Module
BIOS	AMI UEFI BIOS,ACPI Supported, Auto Power On
RJ45	8x Intel® i226-V 2.5G NIC, RJ45
Console	1x Cisco Console Port
SFP	2x QSFP Support 40G (Option: 4x SFP+ 10G)
USB	4x USB3.0 Ports
Output	1x VGA Output
Form Factor	1U Rack Chassis, 430x280x45mm
Power Type	ATX Power Supply
Redundant	Support Additional Redundant Power (Not Hotswap)
Operating Temperature	Operation Temperature: 0~60°C Storage Temperature: -10~70°C
Humidity	Operating: 10%~90% Storage: 5%~95%, Non-condensing

** All product specifications and product images are subject to change without notice.

Purchase Information

Part No	CPU	RAM	SSD	LAN	SFP	Console	Output	SIM Slot
SHIELD-1U-8L-2(40G)SFP-C612-Xe	E5-2699V4	2x DDR4	2x NVME	8x i226-V	2x 40G	1	1	1

www.cme.co.za